


IPC-VEC7153PF-E/NF-E

2Mp CMOS Full HD Vandal-proof Network Mini Dome Camera



Model


IPC-VEC7153PF-E: 2.0 Megapixel CMOS, 25fps@1080P, 2.8mm/3.6mm/6mm/8mm optional lens, PoE, IK10, IP66

IPC-VEC7153NF-E: 2.0 Megapixel CMOS, 30fps@1080P, 2.8mm/3.6mm/6mm/8mm optional lens, PoE, IK10, IP66

Features

- 1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS image sensor
- High-performance TI DaVinci series DSP
- H.264 video compression and JPEG image capture
- Max 25/30fps@1080P resolution
- Dual encoding streams supported
- Built-in 2.8mm/3.6mm/6mm/8mm lens
- Max 32GB Micro SD card for local storage
- Support DC12V power supply, PoE
- IK10-rated Vandal-proof & IP66 Water-proof
- Newly designed fashionable WEB Client
- Free CMS, free mobile phone APPs

Dimensions (mm)

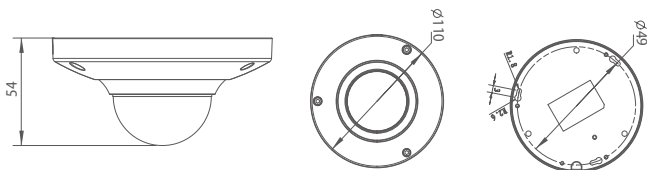

Specifications

Model	IPC-VE C7153PF-E	IPC-VE C7153NF-E
General		
Processor	TI DaVinci Series DSP	
Operating System	Embedded LINUX	
Resource	Simultaneous remote monitoring, local recording and remote control	
User Interface	WEB, CMS(DSS/ PSS), DMSS, NVR	
Camera		
Image Sensor	1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS	
Effective Pixels	1920 (H)×1080(V)	
Electronic Shutter	Auto/Manual, 1/3~1/10000s	Auto/Manual, 1/4~1/10000s
Mini. Illumination	0.2LUX/F1.6(Color), 0.01LUX/F1.6(B/W)	
Signal Noise Ratio	>50dB	
Gain Control	Auto/Manual	
White Balance	Auto/Manual	
Day/Night	Electronic	
Lens Mount	M12	
Lens	2.8mm/3.6mm/6mm/8mm optional	
Video		
Video Compression	H.264/MJPEG	
Image Resolution	1080P(1920×1080) /720P(1280×720) / D1(704×576) / CIF(352×288)	
Encoding Speed	1080P/720P(1~25fps) + D1(1~25fps)	1080P/720P(1~30fps) + D1(1~30fps)
Bit Rate	160K~8Mbps	
Snapshot	Fastest 1fps JPEG capture	
Network		
Ethernet	RJ-45 (10/100Base-T)	
Network Functions	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF	
Remote Operation	Monitor, Playback, System setting, File download, Log information, Maintenance & Upgrade	
Auxiliary Interface		
MicroSD Card	Max 32GB, local storage	
Environmental		
Power Supply	DC12V, PoE	
Power Consumption	<4W	
Ingress Protection	IK10 & IP66	
Operating Environment	-10°C~+60°C, 10%~90%	
Dimension	Φ110mm×54mm	
Weight	500g	